


Quarto 270 - LED module

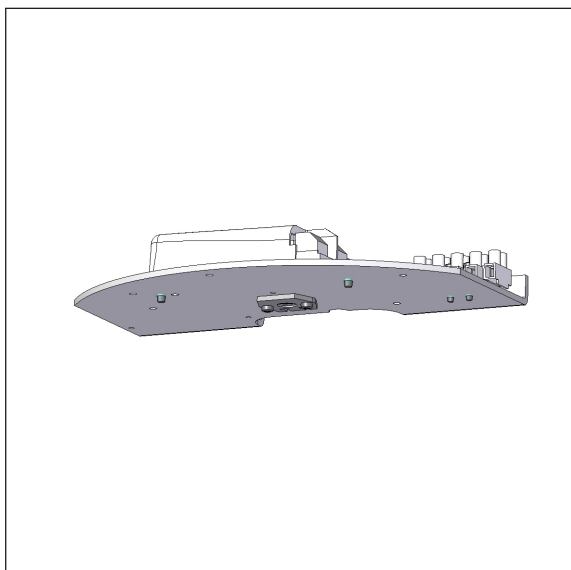

Complete LED module for easy and efficient refurbishment of existing Quarto 270 fixtures, interior and exterior.

LED and driver specification:

LED type: Bridgelux V8
 Energy consumption: 6, 8, or 11 W
 Operational life: min 100,000 hours at ta max 25°C, L90B10
 Colour temperature: 2700, 3000 or 4000 K, energy eff. class F
 Colour rendering: min 90 Ra
 Colour accuracy: 3 Steps SDCM
 Output ratio: 76 per cent
 Driver: LED driver, dimming optional
 Operational life: min 100,000 hours

Exchange of lamp module:

Remove the Quarto shield by loosening the screw on top of the fitting and lifting up the shield.

In case of fittings for LED and compact fluorescent, loosen cables and the screws of the insert and lift it off.

Loosen the screw to the clamp lid and remove the lid.

Use the existing screws for fastening the new LED module.

Connect the installation and assemble the lamp in reverse order.

We include a blank lable in the consignment. Write the old item number on the lable and attach it inside the luminaire.



Variants:

LED module for Quarto 270									
Item No.	Lamp type		Select colour temperature and other options in the table below.						
1972-	6 W Bridgelux V8, 250 mA								
1911-	8 W Bridgelux V8, 350 mA								
1912-	11 W Bridgelux V8, 500 mA								
Combine with:	Colour temperature		Dimming						
	927	2700 K, 90 Ra	V	1-10V					
	930	3000 K, 90 Ra	D	Dali					
	940	4000 K, 90 Ra	R	bluetooth sensor					
Example:	1912-930D = 11 W LED module, 3000 K, 90 Ra, Dali								
The above LED modules fit the following variants (X stands for colour code):									
Interior	401X, 411X, 4001X, 4101X, 4201X, 4301X, 4801X 4001, 4803, 4804								
Exterior	601X, 611X, 6001X, 6101X, 6201X, 6301X, 6801X, 6001, 6803, 6804								