

Pelée surface mounted

Design: Cubo Architects



The Pelée family consists of recessed, surface and wall mounted, suspended, and downlight luminaires.

The inner conical steps, characteristic for all Pelée luminaires, contribute to a comfortable, non-glaring spread of light.

Dimensions, surface-mounting:

Diameter: 250 and 385 mm

Powder coating:

White RAL 9010 Textura
Black Noir 900 Sablé
Alu-grey RAL 9006 Textura
Corten brown YX355F

Lamp type:

LED, exchangeable


Pelée 385 surface mounted

Design: Cubo Architects



Luminaire

Material:	Cast aluminium, powder coated white RAL 9010 Textura black Noir 900 Sablé SN351F alu-grey RAL 9006 Textura corten brown YX355F
Shade:	opalised or microprismatic acrylic
Mounting:	On ceiling
Connection:	max 2 cables, 5x1.5 mm ² into 5-pole 2x2.5 mm ² terminal block
Classification:	IP20, class I
Weight:	3.3 kg
Lamp type:	LED, exchangeable

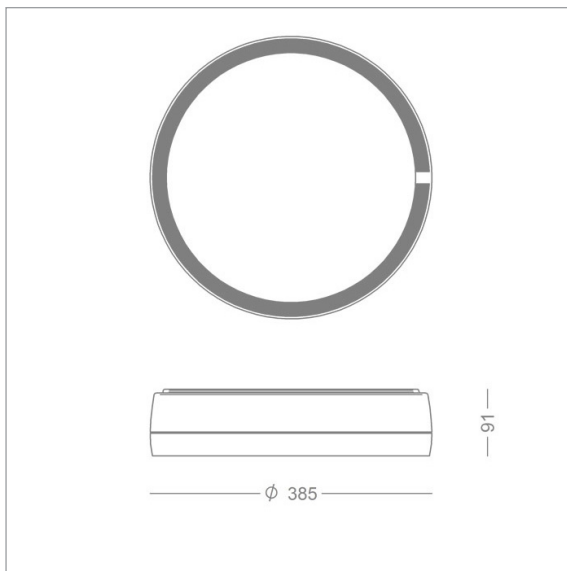

LED and driver

LED:	324 mm board
Total consumption:	17, 23, or 33 W
Service life:	min 50,000 hours at ta 25°C L80B10
Colour temperature:	2700, 3000, or 4000 Kelvin alt. 2700-6500 K tunable
Energy classes:	2700 K: E 3000, 4000, 6500 K: D
Colour rendering:	min 90 Ra
Colour accuracy:	3 steps SDCM
Driver 17-23 W:	500-700 mA, dimming optional
Driver 33 W:	1050 mA, incl Dali

Product codes

PELÉE 385 surface-mounted								
Item No.	Lamp type		Select colour, colour temperature etc. in the table below.					
2886-	17 W LED, 500 mA							
2887-	23 W LED, 700 mA							
	33 W LED, 1050 mA, incl. Dali							
Combine with:	Colour	Shade		Colour temperature			Dimmable driver	
	1 white	empty	opalised	927	2700 K, 90 Ra	empty	no dimming	
	9 alu-grey	M	microprismatic	930	3000 K, 90 Ra	D	Dali	
	17 corten brown			940	4000 K, 90 Ra	V	1-10 V	
	66 noir 900			9WD	TW, Dali, 90 Ra			
Example Order code:	2886-1930D = Pelée 385 surface-mounted, 17 W, white, 3000 K 90 Ra, Dali							

Pelée 250 surface mounted

Design: Cubo Architects



Luminaire

Material: Cast aluminium, powder coated
white RAL 9010 Textura
black Noir 900 Sablé SN351F
alu-grey RAL 9006 Textura
corten brown YX355F

Shade: opalised or microprismatic acrylic


Mounting: On ceiling

Connection: max 2 cables, 5x1.5 mm² into
5-pole 2x2.5 mm² terminal block

Classification: IP20, class I

Weight: 2.8 kg

Lamp type: LED, exchangeable

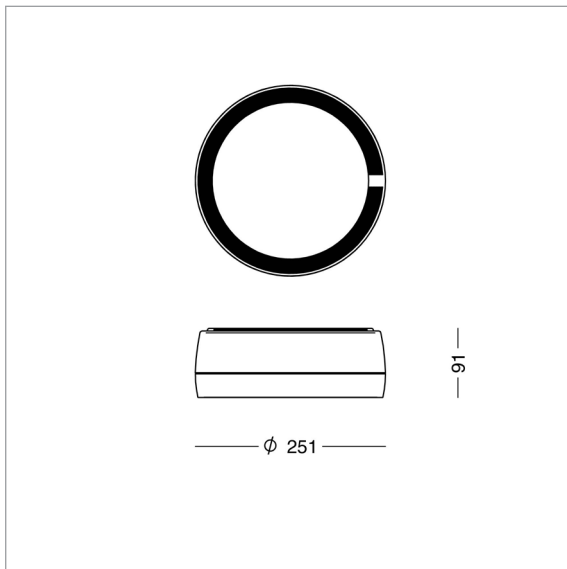

LED and driver

LED: 213 mm board

Total consumption: 11 or 15 W

Driver: 350-500 mA

Service life: min 50,000 hours at ta 25°C
L80B10

Colour temperature: 2700, 3000, or 4000 Kelvin
alt. 2700-6500 K tunable

Energy classes: 2700 K: E
3000, 4000, 6500 K: D

Colour rendering: min 90 Ra

Colour accuracy: 3 Steps SDCM

Output ratio: 68.5%

Product codes

PELÉE 250 surface-mounted								
Item No.	Lamp type		Select colour, colour temperature etc. in the table below.					
2880-	11 W LED, 350 mA							
2881-	15 W LED, 500 mA							
Combine with:	Colour		Shade		Colour temperature		Dimmable driver	
	1	white	empty	opalised	927	2700 K, 90 Ra	empty	no dimming
	9	alu-grey	M	microprismatic	930	3000 K, 90 Ra	D	Dali
	17	corten brown			940	4000 K, 90 Ra	V	1-10 V
	66	noir 900			9WD	TW, Dali, 90 Ra		
Example Order code:	2881-99WD = Pelée 250 surface-mounted, 15 W, alu-grey, tunable white, 90 Ra, Dali							