

Sticks 3000

Design: schmidt hammer lassen design



Simplicity by design is the principle behind **Sticks 3000** created by schmidt hammer lassen. The lines of the black or grey-enamelled aluminium housing are continued in single or double light slots in opalised plastic. At daylight, **Sticks** is simply part of the environment; at night, light predominates and the surroundings step into character.


Sticks 3000 is available with base for embedment or flanged base for mounting on solid ground. Available with LED.



FOCUS-LIGHTING

Sticks 3000 - LED

Design: schmidt hammer lassen design

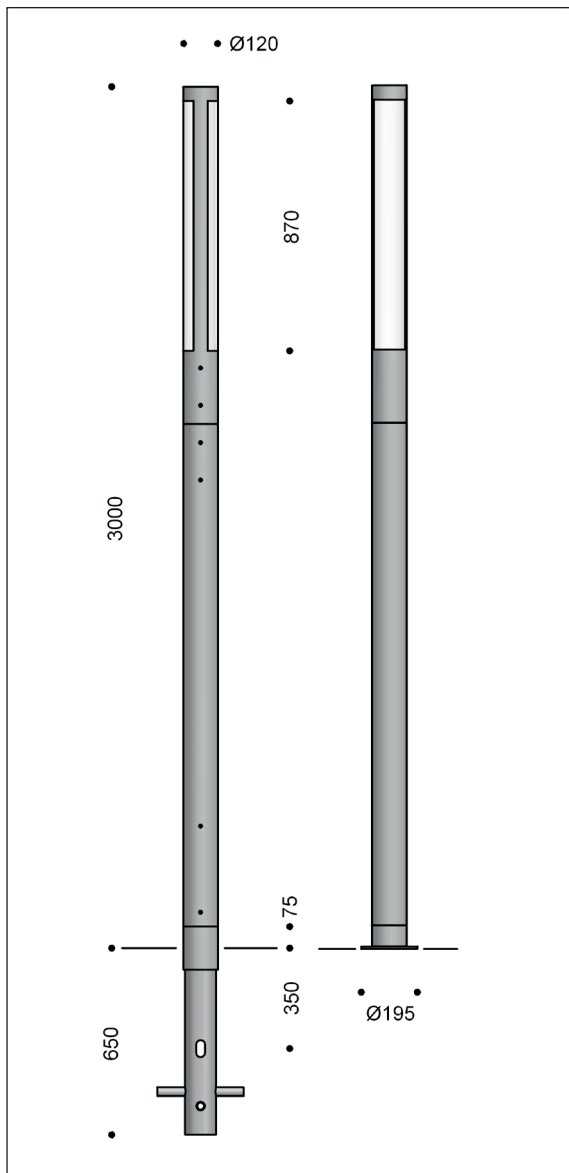

Luminaire specification:

Material:	Aluminium
Coating:	Graphite grey: YW355F Black: RAL 9005 SN805G Black: Noir 900 Sablé SN351F Corten brown: YX355F
Light slots:	Acrylic glas, opalised, single og double sided
Mounting:	With rooted or flanged base
Connection:	max two cables, 5 x 6 mm ² Driver and 4A fuse in the base
Classification:	IP55 , class II
Weight:	30 kg

LED specification:

LED type:	14 W T8-900mm LED-tube (TTC-14WT809-12)
Energy consumption:	14 W (single light slot)
Operational life:	min 40,000 hours at ta max 25°C
Colour temperature:	3000 or 4000 Kelvin
Colour rendering:	min 70 Ra
Output ratio:	53 per cent

Product codes:

Sticks 3000, LED, single light slot						
Item Nos.	Mounting		Lamp type			
8834-	rooted base		14 W T8-900 mm LED tube			
8844-	flanged base		14 W T8-900 mm LED tube			
Sticks 3000, LED, double light slot						
8835-	rooted base		2 x 14 W T8-900 mm LED tube			
8845-	flanged base		2 x 14 W T8-900 mm LED tube			
Select colour, colour temperature, etc. in the table below.						
To be combined with:	Colour	Colour temperature		Protection class		
	3 black RAL 9005	730	3000 K, 70 Ra	empty	class II	
	4 graphite grey	740	4000 K, 70 Ra	J	class I	
	9 silver grey					
	17 corten brown					
	66 black noir 900					

Example Order code:	8834-4730 = Sticks 3000 single light slit, rooted base, 14 W LED, graphite grey, 3000 K 70 Ra
---------------------	---

Find our sales partner in your country under Contacts at www.focus-lighting.dk