


Punkt Lamp 65

Design: focus lighting



The design of the **Punkt Lamp** is dominated by the inner shade in mouth-blown glass, spreading the light in a pleasant and beautiful way.

The new LED versions of the Focus Punkt Lamps combine diffuse light and spot light. Thus they meet the requirements of the European standard for general lighting in indoor work places. The LED is hidden behind a diffuser, and no inside components are visible. Furthermore, the diffuser contributes to an even illumination of the glass shade, and the visual appearance of the Punkt Lamp with LED fully matches that of the conventional incandescent lamps.

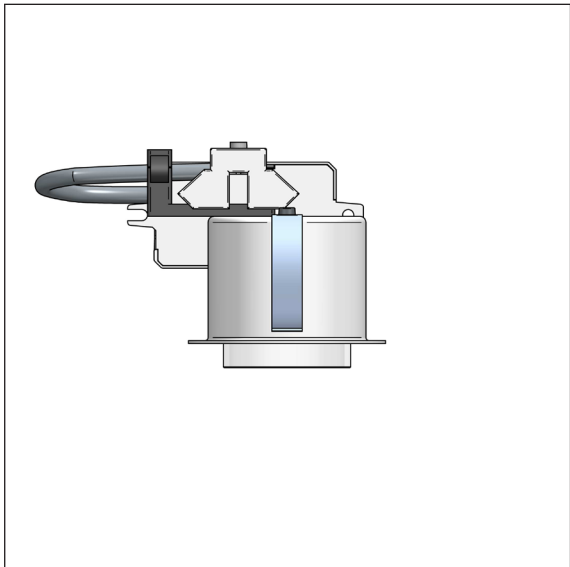

Dimension:

65 mm diameter

The Punkt Lamp is also available in 90, 110, 150, and 200 mm diameter.

Finish:

White or grey metallic with inner cylinder in frosted glass.

Lamp types for Ø65:

The 65 mm Punkt lamp is available with Bridgelux V6 LED. V6 is a compact light source with high output and true colour reproduction.

Mounting:


All Punkt lamps are approved for recession in various types of ceilings. With a special waterproof cover, they can be used in bath rooms and outdoors in roofs and carports.

Punkt Lamp 65:

The fixture can be recessed into isolated ceiling.

Punkt Lamp 65

Design: focus lighting

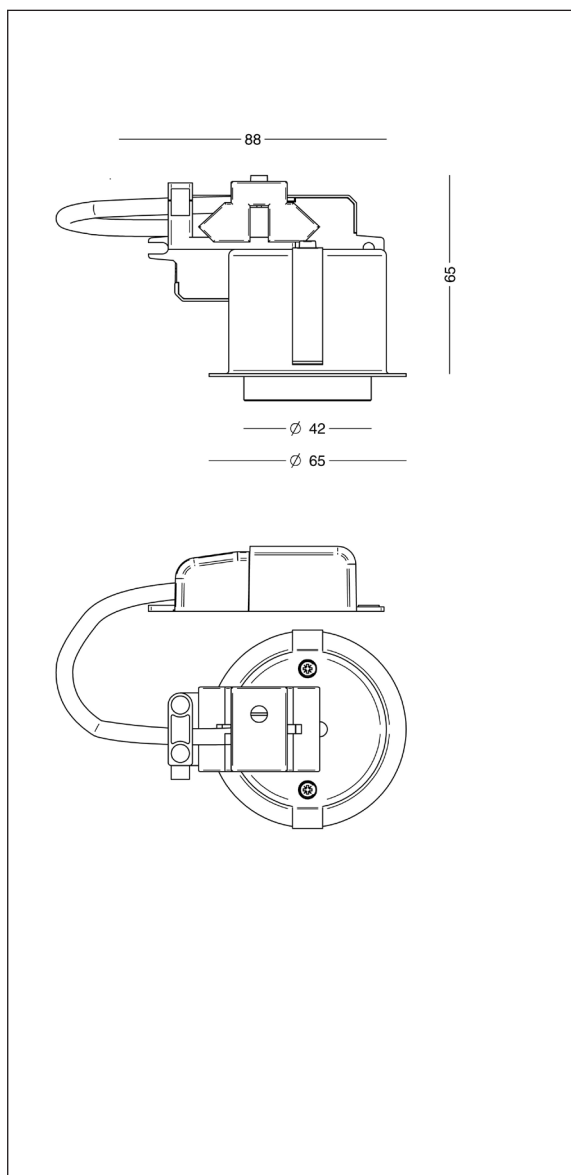

Luminaire specification:

Material: Aluminium
 Diffuser: Cylindrical frosted glass, flexible if pegs are broken off.
 Mounting: To be recessed
 Cut out: Diameter 54-56 mm in 10-20 mm plates
 Built-in-height: min 65 mm
 Clearances: Horizontally: min 50 mm
 Tilslutning: Terminal block
 Classification: IP20, class II
 Weight: 0.1 kg

Extra: Ring for soft ceilings
 IP21 sealing

LED and driver specification:

LED type: Bridgelux V6
 Total consumption: 5 W (350 mA)
 Service life: min 100,000 hours at t_a max 25°C, L90B10
 Colour temperature: 2700, 3000, and 4000 K
 Energy eff. class: F
 Colour rendering: min 90 Ra
 Colour accuracy: 3 steps SDCM

Driver: TCI Bull
 Dimmable driver: TCI Mini Jolly
 Service life: min 50,000 hours

Product codes:

Punkt Lamp 65 LED					
Item No.	Lamp type/driver		Select colour and colour rendering in the table below.		
2890-	5 W V6, 350 mA				
Combine with:	Colour	Colour temperature		Dimming	
	2 white w. glass	927	2700 K, 90 Ra		empty no dimming
	9 grey metallic w. glass	930	3000 K, 90 Ra		T Triac
		940	4000 K, 90 Ra		V 1-10 V
					D Dali
Example: 2890-2927V = Punkt Lamp Ø65, 5 W, white w. glass, 2700 K, 90 Ra, dimmable 1-10 V					
Extra					
2700-20	Ring for soft ceilings				